


HK-100/101 Hand-held Type K General Purpose Sensor (+1000°C)

The HK-100/101 sensor has a 3.2mm diameter mineral insulated stem, rated for use up to +1000°C. Available in two lengths: 150mm (HK-100) and 75mm (HK-101). The plastic handle is rated up to +135°C. Supplied with 1 metre of coiled extension cable with a Type K miniature flat pinned plug attached.

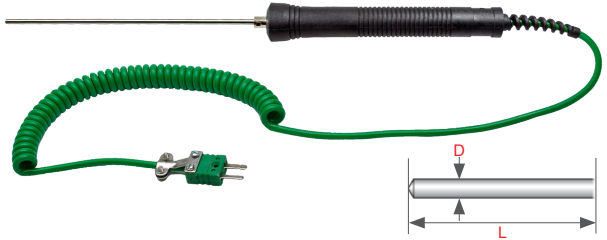


- General purpose sensor
- Stem rated up to +1000°C, handle rated up to +135°C
- 75mm or 150mm stem length
- 3.2mm Ø stem

Technical Details	HK-100	HK-101
Stem Temperature Rating	Up to +1000°C	Up to +1000°C
Handle Temperature Rating (Plastic)	Up to +135°C	Up to +135°C
Stem Diameter (D)	3.2mm	3.2mm
Stem Length (L)	150mm	75mm

Order Code	150mm Stem HK-100	75mm Stem HK-101
------------	------------------------------	-----------------------------

HK-200 Hand-held Type K Needle Tip Penetration Sensor (+800°C)

The HK-200 sensor has a sharp pointed tip that is suitable for penetration into semi-solids. The stem is rated for use up to +800°C and available in two sizes: 3.2mm Ø x 150mm (HK-200/3.2) or 4.7mm Ø x 150mm (HK-200/4.7). The plastic handle is rated up to +135°C. Supplied with 1 metre of coiled extension cable with a Type K miniature flat pinned plug attached.

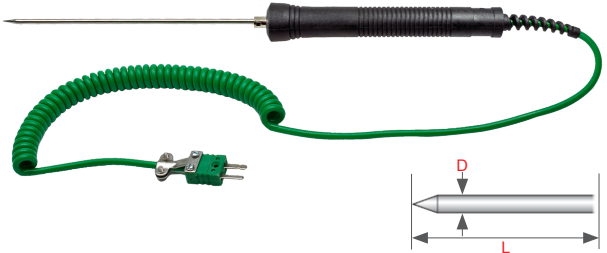


- Suitable for penetration into semi-solids
- Stem rated up to +800°C, handle rated up to +135°C
- 150mm stem length
- 3.2mm Ø or 4.7mm Ø stem

Technical Details	HK-200/3.2	HK-200/4.7
Stem Temperature Rating	Up to +800°C	Up to +800°C
Handle Temperature Rating (Plastic)	Up to +135°C	Up to +135°C
Stem Diameter (D)	3.2mm	4.7mm
Stem Length (L)	150mm	150mm

Order Code	3.2mm Ø Stem HK-200/3.2	4.7mm Ø Stem HK-200/4.7
------------	------------------------------------	------------------------------------

HK-300 Hand-held Type K Air/Gas Temperature Sensor (+600°C)

The HK-300 sensor has a perforated outer sheath to allow the free flow of air/gas around the sensor, giving a faster speed of response. The stem is 6.35mm diameter x 150mm long (rated for use up to +600°C). The plastic handle is rated up to +135°C. Supplied with 1 metre of coiled extension cable with a Type K miniature flat pinned plug attached.

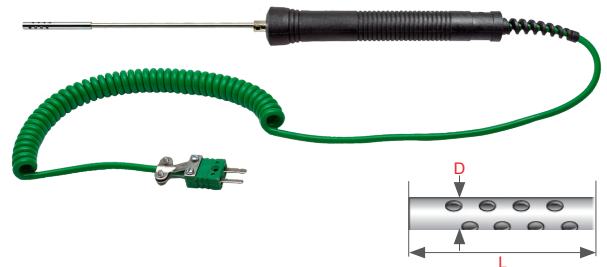

- Perforated outer sheath for free flow of air/gas
- Stem rated up to +600°C, handle rated up to +135°C
- 150mm stem length
- 6.35mm Ø stem

Technical Details	
Stem Temperature Rating	Up to +600°C
Handle Temperature Rating (Plastic)	Up to +135°C
Stem Diameter (D)	6.35mm
Stem Length (L)	150mm

Order Code	HK-300
------------	---------------