

PSA/PSB RTD (Pt100/Pt1000) Silicone Patch Sensor




Self adhesive silicone patch Platinum Resistance Thermometer sensors, commonly used for pipe or surface measurement. Available in two different sizes, but can easily be trimmed if a smaller footprint is required.





Supplied as a 4-wire configuration with a 2 metre PFA insulated stranded extension cable. Custom lengths can be supplied to suit the application.

Operating range -30°C to +200°C. The standard sensor (PSA) has a silicone cable support; the compact sensor (PSB) has a PTFE heatshrink cable support.

PSA patch dimensions: 40mm (L) x 15mm (W) x 6mm max depth.
PSB patch dimensions: 31mm (L) x 13mm (W) x 4mm max depth.

- Self adhesive
- Standard and compact versions available
- -30°C to +200°C operating range
- Commonly used for pipe or surface measurement

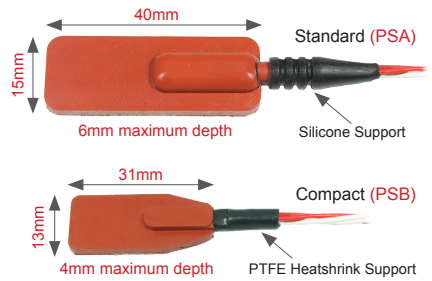

1		sensor type				code	
		RTD (Pt100) Standard Silicone Patch Sensor				PSA	
		RTD (Pt1000) Standard Silicone Patch Sensor				PSAK	
		RTD (Pt100) Compact Silicone Patch Sensor				PSB	
		RTD (Pt1000) Compact Silicone Patch Sensor				PSBK	
2	wiring configuration	code	3	grade of element	accuracy at 0°C	accuracy at 100°C	code
	2-wire	2		B	± 0.30°C	± 0.80°C	B
	3-wire	3		A	± 0.15°C	± 0.35°C	A
	4-wire (Simplex only)	4					
4	cable length (mm)						code
	As required to suit your application (standard length = 2000mm)						e.g. 2000
5	extension cable						code
	PFA Insulated, Twisted Cores, 7/0.2mm Ø conductors (+260°C), 2-wire						PT3220
	PFA Insulated, Twisted Cores, 7/0.2mm Ø conductors (+260°C), 3-wire						PT3320
	PFA Insulated, Twisted Cores, 7/0.2mm Ø conductors (+260°C), 4-wire						PT3420
	PFA Insulated, Twisted Cores, 7/0.2mm Ø conductors, PFA Sheathed (+260°C), 2-wire (page 52)						PT4220
	PFA Insulated, Twisted Cores, 7/0.2mm Ø conductors, PFA Sheathed (+260°C), 3-wire (page 52)						PT4320
	PFA Insulated, Twisted Cores, 7/0.2mm Ø conductors, PFA Sheathed (+260°C), 4-wire (page 52)						PT4420
See page 52 for our full range of RTD cable.							
6	optional RTD connector (supplied attached to cable)						code
	   						
	Miniature RTD Plug						FMPU
	Miniature 3-Pin RTD Plug						FMPTU
	Standard RTD Plug						RSPU
	Standard 3-Pin RTD Plug						RSPTU
See pages 53-58 for our full range of RTD connectors.							
Thermocouple version page 25							
order code (example)		1	2	3	4	5	6
		PSA	- 2	- B	- 2000	-	PT3220 - FMPU


PR RTD (Pt100/Pt1000) Rugged Wall-Mounting Sensor

A rugged construction that is suitable for internal or external applications. The sensor is protected by a 12.7mm diameter x 75mm long perforated sheath. These perforations allow for free circulation of air around the sensor for improved speed of response.

The heavy duty housing can be wall or surface mounted and is rated to IP68. The housing has dimensions of 98.5mm (W) x 56.5mm (D) and has a 20mm x 1.5mm cable entry (M20).

The assemblies are suitable for use between the temperatures of -50°C and +150°C. Supplied 3-wire configuration as standard. 2 or 4-wire configurations also available. Class B elements are supplied as standard.

- Suitable for internal or external applications
- Suitable for use between -50°C and +150°C
- 98.5mm (W) x 56.5mm (D) housing
- M20 cable entry (20mm x 1.5mm)

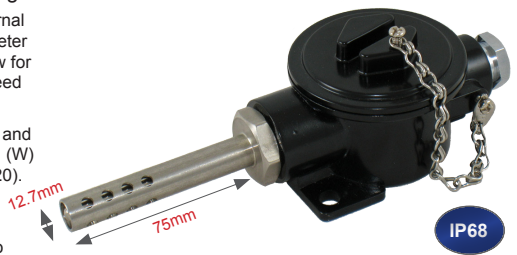

Also available with a head mounting transmitter fitted

order code	Pt100 Sensor	Pt1000 Sensor
	PR-12.7-S-75-3-B	PRK-12.7-S-75-3-B