

## HH-521BT 4 Channel Thermocouple Data Logger (with Bluetooth)

Accepts Thermocouple Types K, J, T, N, E, R, S

Easy to use, high accuracy, hand-held thermocouple data logger with four input channels and Bluetooth capability. Powered by batteries or USB.

Simply connect your thermocouple sensor(s) using a miniature flat-pinned plug. Selectable between thermocouple inputs K, J, T, N, E, R and S.

All four input channels are shown on the screen at once, identified as T1, T2, T3 and T4, with the ability to also show T1-T2 differential.

The data logger can store/recall up to 100 manual data logging 'spot' readings, or over 32,000 readings per channel in automatic logging mode. An alarm on channel 1 (T1) can be configured to audibly alert if the temperature exceeds a high or low limit.

Install the free Windows software on a PC and connect to the data logger using the supplied USB cable or wirelessly via Bluetooth (for wireless connections the PC must be Bluetooth capable). The software can retrieve historical logged data or perform real-time logging on-screen; data can be printed, graphed and exported in .csv, .txt or .ghf format (.ghf format for use only with the software). Exported files can be loaded into the software or other applications such as Microsoft® Excel.

With the free "Testlink" app installed on an iOS or Android device, historical or real-time data can be viewed wirelessly, saved and shared, removing the need to connect the data logger to a computer.

- 4 thermocouple input channels (accepts types K, J, T, N, E, R, S)
- 32,000 points per channel, 100 sets of manually saved data
- High accuracy, fast response, selectable sampling rate
- T1, T2, T3, T4 and T1-T2
- °C / °F selectable
- Backlit LCD display, integrated tilt stand
- Min, Max, Avg, Hold, Mem, Recall, Offset, Setup, Temp. Unit, Alarm
- Battery or USB powered, auto power off / low battery indicator
- Free Windows software for real-time logging or historical data retrieval
- Supplied with carry case, instruction manual, batteries, software, micro USB cable and Bluetooth adapter



Bluetooth®




Top view

Technical Details	
<b>Input (miniature plug) *</b>	4 x Thermocouple
<b>Measurement Range</b>	<b>K</b> -200°C to +1372°C (-328°F to +2501°F)
	<b>J</b> -200°C to +1000°C (-328°F to +1832°F)
	<b>T</b> -200°C to +400°C (-328°F to +752°F)
	<b>N</b> -200°C to +1300°C (-328°F to +2372°F)
	<b>E</b> -200°C to +750°C (-328°F to +1382°F)
<b>R,S</b> 0°C to +1767°C (+32°F to +3212°F)	
<b>Accuracy **</b>	<b>K, J, T, N, E</b> ±(0.1% of rdg +0.7°C) ±(0.1% of rdg +1.3°F) Below -100°C (-148°F): ±(0.5% of rdg +0.7°C) ±(0.5% of rdg +1.3°F)
	<b>R, S</b> ±(0.2% of rdg +1.4°C) ±(0.2% of rdg +2.5°F)
<b>Resolution</b>	<b>K, J, T, N, E</b> 0.1°C < 600°C / 0.1°F < 1000°F, 1°C ≥ 600°C / 1°F ≥ 1000°F
	<b>R, S</b> 0.2°C < 600°C / 0.5°F < 1000°F, 1°C ≥ 600°C / 1°F ≥ 1000°F
<b>Temperature Coefficient</b>	0.01% of reading +0.05°C (0.0028°F) per °C [< 18°C (64°F) or > 28°C (82°F)]
<b>Manual Logging Capacity</b>	100 readings
<b>Auto Logging Capacity</b>	32,000 readings per channel
<b>Sample Rate</b>	2 times per second
<b>Display</b>	Backlit LCD display
<b>Functions</b>	Min, Max, Avg, Hold, Mem, Recall, Offset, Setup, Temp. Unit, Alarm (T1), Auto Off, Low Battery
<b>Operating Temperature</b>	0°C to +50°C (+32°F to +122°F)
<b>Operating Humidity</b>	10 to 90 %RH (no condensing)
<b>Storage Temperature</b>	-20°C to +60°C (-4°F to +140°F)
<b>Storage Humidity</b>	10 to 75 %RH
<b>Power</b>	4 x 1.5V AAA batteries or via USB
<b>Battery Life (alkaline)</b>	Bluetooth OFF: ~120 hours, ON: ~30 hours
<b>Dimensions</b>	187mm (L) x 75mm (W) x 29mm (H)
<b>Weight</b>	~317g with batteries/bluetooth, ~267g without

\* Thermocouple sensor(s) not supplied - available separately

\*\* Accuracy stated is for indicator only. The thermocouple sensor inaccuracy should also be considered

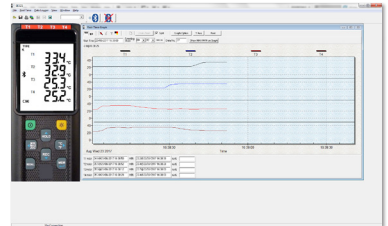

Free software for historical data and real-time logging



Free Bluetooth app available for iOS & Android



order code **HH-521BT**

Please visit our website for latest software functionality and compatibility information

